

SERIES 20

IMO	USCG	RINA	MCA
A-16	GL	CE	BA 9s 12V, 5W

Dimensions in: mm/inch

Series 20

Navigation lights –
Specially designed for motor boats,
easy to fit

Application

Application depending on required visibilities.
See table in technical information.

Housing

Black or white polycarbonate. Seawater
resistant, non-corrosive and non-magnetic,
impact and shock resistant

Optics

Lens: Fresnel, range of visibility 2 nm
(starboard, port and bicolor 1 nm).
Material: polycarbonate, impact and
shock resistant

Protection degree

IP 45




Mounting

Side-mount or deck-mount



Electric

Bulb included


1



2



3






No.		Description	Ship size	Wattage	Visibility	Housing colour	Mounting	Voltage	Article number
1		Starboard	< 12 m / < 39 ft.	5 W	1 nm	Black	side-mount	12 V	3571001000
		Starboard	< 12 m / < 39 ft.	5 W	1 nm	White	side-mount	12 V	3571301000
		Port	< 12 m / < 39 ft.	5 W	1 nm	Black	side-mount	12 V	3572001000
		Port	< 12 m / < 39 ft.	5 W	1 nm	White	side-mount	12 V	3572301000
2		Stern	< 12 m / < 39 ft.	5 W	2 nm	Black	side-mount	12 V	3573001000
		Stern	< 12 m / < 39 ft.	5 W	2 nm	White	side-mount	12 V	3573301000
3		Starboard, deck-mount	< 12 m / < 39 ft.	5 W	1 nm	Black	deck-mount	12 V	3575101000
		Port, deck-mount	< 12 m / < 39 ft.	5 W	1 nm	Black	deck-mount	12 V	3575201000
		Bicolor	< 12 m / < 39 ft.	5 W	1 nm	Black	deck-mount	12 V	3575001000
		Bicolor	< 12 m / < 39 ft.	5 W	1 nm	White	deck-mount	12 V	3575301000
		Masthead	< 12 m / < 39 ft.	5 W	2 nm	Black	deck-mount	12 V	3574001000
		Masthead	< 12 m / < 39 ft.	5 W	2 nm	White	deck-mount	12 V	3574301000


SERIES 20

┌ Dimensions in: mm/inch ─┐


4

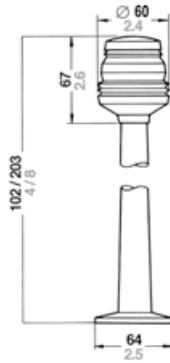


5

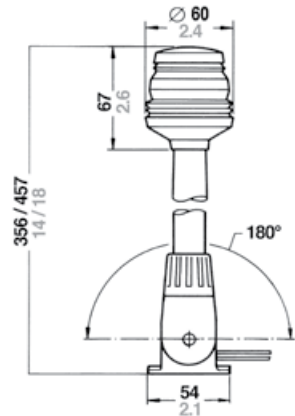



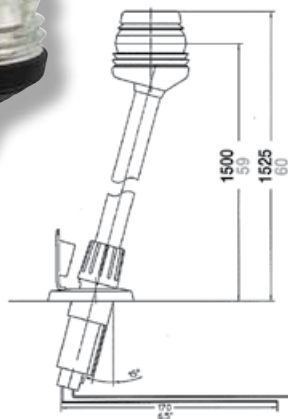



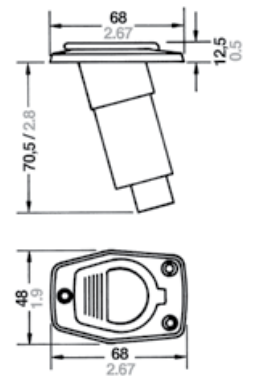



6



7



No.		Description	Ship size	Wattage	Visibility	Housing colour	Voltage	Article number
4		All-round white, pedestal, 102 mm / 4 inch.	12 - < 50 m / 39 - < 164 ft.	5 W	2 nm	Black	12 V	3570030000
		All-round white, pedestal, 102 mm / 4 inch.	12 - < 50 m / 39 - < 164 ft.	5 W	2 nm	White	12 V	3570330000
5		All-round white, fold-down, 356 mm / 14 inch.	12 - < 50 m / 39 - < 164 ft.	5 W	2 nm	Black	12 V	3570001000
		All-round white, fold-down, 356 mm / 14 inch.	12 - < 50 m / 39 - < 164 ft.	5 W	2 nm	White	12 V	3570301000
		All-round white, fold-down, 457 mm / 18 inch.	12 - < 50 m / 39 - < 164 ft.	5 W	2 nm	Black	12 V	3570002000
		All-round white, fold-down, 457 mm / 18 inch.	12 - < 50 m / 39 - < 164 ft.	5 W	2 nm	White	12 V	3570302000
		Masthead, fold-down, 356 mm / 14 inch.	< 12 m / < 39 ft.	5 W	2 nm	Black	12 V	3574003000
6		All-round white, plug-in, 1066 mm / 42 inch.	12 - < 50 m / 39 - < 164 ft.	5 W	2 nm	Black	12 V	3570010000
		All-round white, plug-in, 1066 mm / 42 inch.	12 - < 50 m / 39 - < 164 ft.	5 W	2 nm	White	12 V	3570310000
		All-round white, plug-in, 1220 mm / 48 inch.	12 - < 50 m / 39 - < 164 ft.	5 W	2 nm	White	12 V	3570311000
7		Plug-in base				Black		E-8357001600
		Plug-in base				White		E-8357002400

